



SASSO 60 base 1 lamp

ceiling

EN Cylindrical or square spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable (cylindrical versions); surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

DE Zylindrischer bzw. quadratischer Strahler aus Aluminium; Lichteinsatz lackiert; Gehäuse pulverbeschichtet; Lichteinsatz dreh- und schwenkbar (zylindr. Varianten); Anbaugehäuse aus Aluminium inkl. Konverter; Montageplatte mit vormontierter Konvertereinheit vorab montierbar; Leuchtenkörper mittels Verriegelung werkzeuglos aufsetzbar; präzise Abstrahlcharakteristik durch hochwertige Linsenoptik; COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Leuchte für Weiterverdrahtung

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM
UGR ≤ 10 , UGR ≤ 13 , UGR ≤ 16 ,
UGR ≤ 19
up to 95 lm/W
L80 / 50000 h
DALI-2, non DIM
IP20

Types



Colour



Inner colour



Light distributions




glare control
(UGR ≤ 16)



easy mounting
no visible
screws



CRI ≥ 95 2
SDCM
(optional)



SASSO 60 base round adjustable 1 lamp ceiling



SPOT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	0 4 8 - 3 1 3 0 9 S
	3000 K	759 lm	73 lm/W	0 4 8 - 3 1 3 0 0 S
	3500 K	775 lm	75 lm/W	0 4 8 - 3 1 3 0 2 S
	4000 K	799 lm	77 lm/W	0 4 8 - 3 1 3 0 1 S

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	0 4 8 - 3 1 3 0 9 M
	3000 K	907 lm	89 lm/W	0 4 8 - 3 1 3 0 0 M
	3500 K	927 lm	91 lm/W	0 4 8 - 3 1 3 0 2 M
	4000 K	946 lm	93 lm/W	0 4 8 - 3 1 3 0 1 M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	0 4 8 - 3 1 3 0 9 F
	3000 K	862 lm	85 lm/W	0 4 8 - 3 1 3 0 0 F
	3500 K	880 lm	86 lm/W	0 4 8 - 3 1 3 0 2 F
	4000 K	899 lm	88 lm/W	0 4 8 - 3 1 3 0 1 F

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.


WIDE FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	0 4 8 - 3 1 3 0 9 W
	3000 K	909 lm	89 lm/W	0 4 8 - 3 1 3 0 0 W
	3500 K	928 lm	91 lm/W	0 4 8 - 3 1 3 0 2 W
	4000 K	948 lm	93 lm/W	0 4 8 - 3 1 3 0 1 W

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.



SASSO 60 base square downlight 1 lamp ceiling



SPOT CRI ≥ 90













SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.4 W	2700 K	751 lm	72 lm/W	0 4 8 - 3 0 3 0 9 S
	3000 K	775 lm	75 lm/W	0 4 8 - 3 0 3 0 0 S
	3500 K	792 lm	76 lm/W	0 4 8 - 3 0 3 0 2 S
	4000 K	816 lm	78 lm/W	0 4 8 - 3 0 3 0 1 S

The data values for the luminous flux may differ for specific order options by -7%. Luminous flux value refers to inner colour matt silver.

Order options













CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white	7
				gold dust	9

MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	894 lm	88 lm/W	0 4 8 - 3 0 3 0 9    M
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0    M
	3500 K	948 lm	93 lm/W	0 4 8 - 3 0 3 0 2    M
	4000 K	968 lm	95 lm/W	0 4 8 - 3 0 3 0 1    M













The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour matt silver.

FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	856 lm	84 lm/W	0 4 8 - 3 0 3 0 9    F
	3000 K	888 lm	87 lm/W	0 4 8 - 3 0 3 0 0    F
	3500 K	907 lm	89 lm/W	0 4 8 - 3 0 3 0 2    F
	4000 K	926 lm	91 lm/W	0 4 8 - 3 0 3 0 1    F



The data values for the luminous flux may differ for specific order options by -13%. Luminous flux value refers to inner colour matt silver.

WIDE FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	895 lm	88 lm/W	0 4 8 - 3 0 3 0 9    W
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0    W
	3500 K	949 lm	93 lm/W	0 4 8 - 3 0 3 0 2    W
	4000 K	969 lm	95 lm/W	0 4 8 - 3 0 3 0 1    W

The data values for the luminous flux may differ for specific order options by -10%. Luminous flux value refers to inner colour matt silver.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white	7
				gold dust	9

Oppenländer Rechtsanwälte, Stuttgart


Germany

Architect

Ippolito Fleitz Group
GmbH

Photographer


Zooey Braun

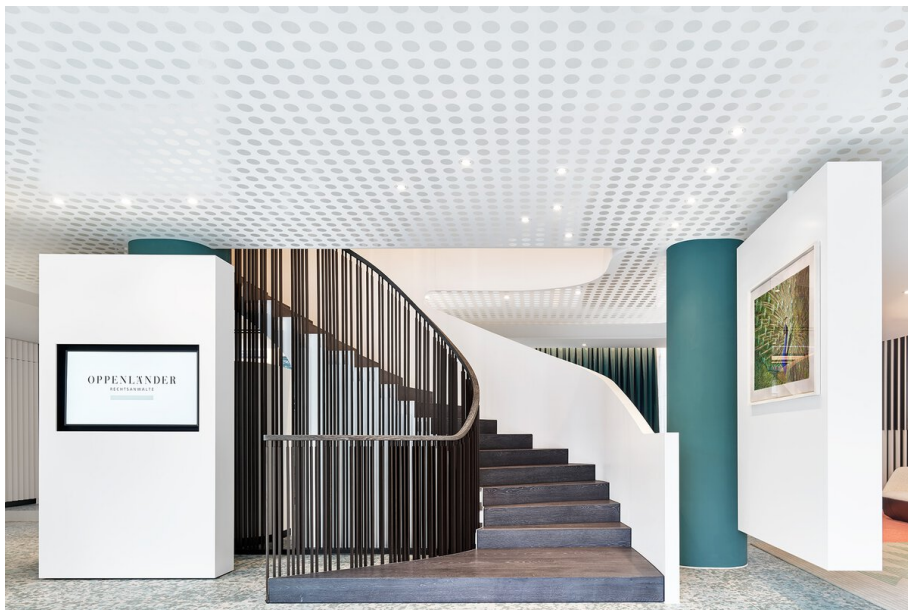

Used products



SASSO 100 round ceiling



MINO 60 CIRCLE suspended



SASSO 60 base 1 lamp ceiling



SASSO PRO 80 adjustable flush round recessed



SASSO 60 round recessed 1 lamp







