

SASSO 60 round adjustable

trimless exposed concrete

048-2622E19F 048-2695210 002-90762



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
 tilt max 30°
 rotation 360°
 gold , RAL 260-M¹
 Mounting set white aluminium
 front IP40 , back IP20
 692 lm
 fixture 68 lm/W²

LED

colour warm dimming
 1800 K - 3000 K
 CRI ≥ 90
 L85 / 50000 h
 initial MacAdam ≤ 3 SDCM
 R_g: 101 , R_r: 94 , R_{f(1-15)}}: 96
 MR 0.64
 MDER 0.58

Optical

flood
 beam angle 36°
 UGR ≤ 19
 PstLM ≤ 1.0³
 SVM ≤ 0.4³

Electrical

DALI-2
 220-240 V
 system 12.0 W
 fixture 10.2 W
 300 mA
 PC2
 1 DALI Addr.

Physical


trimless for exposed concrete ceiling
 length 230 mm
 width 230 mm
 height 162 mm
 2.4 kg

Cutout


recessed depth 120 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 36° beam; UGR ≤ 19; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

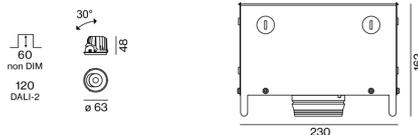

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



SASSO 60 round adjustable

trimless exposed concrete

048-2622E19F 048-2695210 002-90762



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.94	0.91	0.89	0.86
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

Components

EXPOSED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	230-230-162	048-2695210



POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
28 W	143-43-30	002-90762



Optional electrical accessories

DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



Optional electrical accessories

POWER SUPPLY PREWIRED

TYPE	ARTICLE NUMBER(S)
with junction box DALI-2	002-90790A
with junction box DALI-2	002-90748A
with junction box non DIM	002-90771A
with junction box non DIM	002-90742A



SASSO 60 round adjustable

trimless exposed concrete

048-2622E19F 048-2695210 002-90762



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
with loop through function	185-30-21	002-90770
with loop through function	185-30-21	002-90747