

MOVE IT 25 ACOUSTIC triangle

inlay


050-231421D



Project / Type

Notes

Count / Date

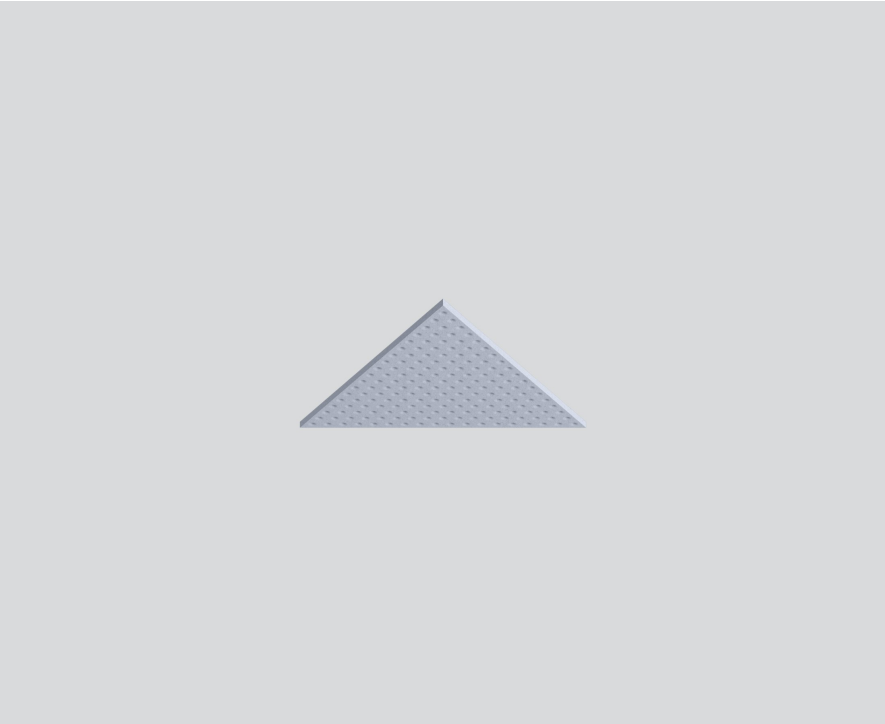

General

Luminaire / Track | Mounted

marble grey

fire resistance class: B-s1, d0

Physical

panel only for NODE connector + track 1210 mm

length 1195 mm | width 1035 mm | height 25 mm

Acoustics

Alpha w (α_w) up to 1 ¹

SAC (sound absorption class) up to A ¹

NRC up to 1.3 ¹

SAA up to 1.32 ¹


¹ Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; triangular design; high quality visual and tactile surface with embossed pattern, marble grey; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

Product drawing



MOVE IT 25 ACOUSTIC triangle

inlay

050-231421D



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.33	0.57	0.73	0.97	1.27	1.33

Sound absorption coefficient (α_p)

