


BETO direct / indirect

free standing U-shape

074-69445TXB




Project / Type	
Notes	
Count / Date	

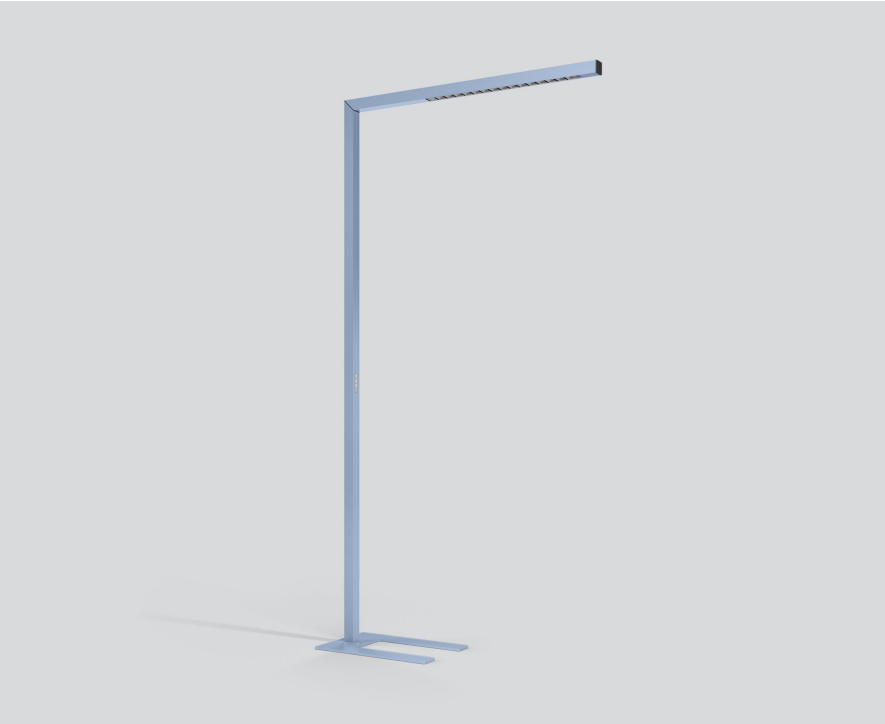

Free standing luminaire from extruded aluminium profile in angular design; extremely slim design (only 42 x 42 mm); square downpipe; pedestal with recess for table base (U-shape); surface special colours powder coated; direct/indirect illumination characteristic; direct light component with high gloss reflector + faceted design and asymmetric radiation characteristic; Reflector dark chrome; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination; UGR ≤ 10 ; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; incl. Loxone Air module for easy integration into the Loxone home and building automation system; including TOUCH DIM miniature push-button; incl. connection cable (3m) with safety plug; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Floor Standing	
special colours	
Reflector dark chrome	
black	
IP20	
indirect 5020 lm direct 1320 lm	
total 6340 lm	

LED

3000 K	
CRI ≥ 80	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.56 MDER 0.51	

Optical

Reflector asymmetric	
UGR ≤ 10	
PstLM ≤ 1.0 ¹ SVM ≤ 0.4 ¹	

Electrical

Loxone Air / touch DIM on pole	
PC1 220-240 V	
system 51 W	
system 124 lm/W ²	

Physical

U-shape	
length 1055 mm width 42 mm height 2100 mm	

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

