

# ARY cable suspended 2 lamps


MOVE IT PRO  
086-73100387M



Project / Type

Notes

Count / Date

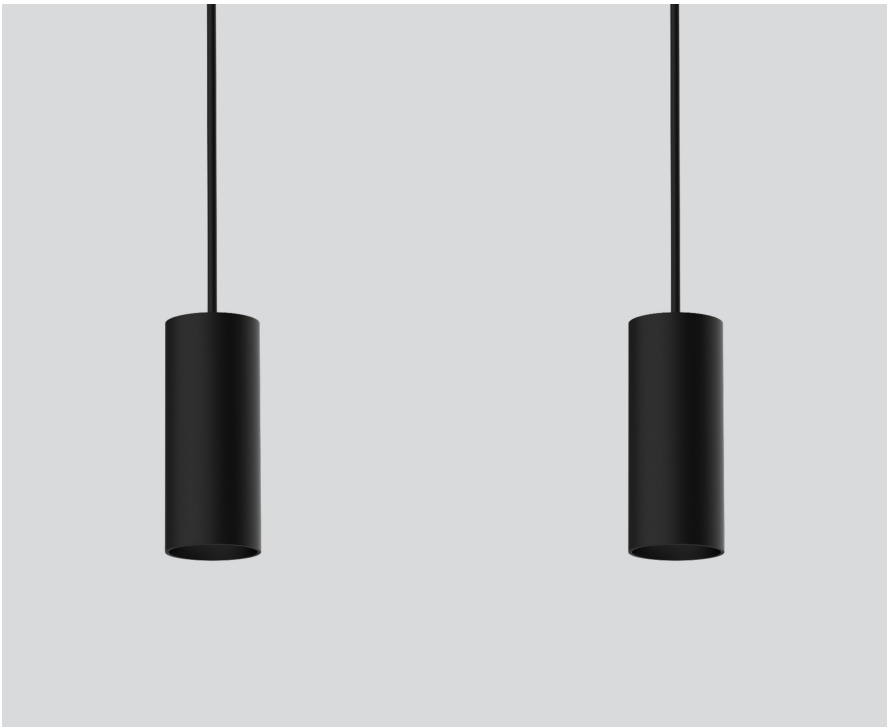

Decorative pendant light inset made of aluminium; 2 lamps; cylindrical spotlight heads; surface jet black powder coated; light inset, incl. high power adapter + converter can be installed flexibly and without tools; power supplied via MOVE IT PRO system track profile; pendant fitting with 2000mm suspension, incl. feed (jet black), can be individually shortened; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 25° beam; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Ceiling | Track Suspended

jet black | RAL 9005

Converter Traffic White

IP20

2040 lm

LED

3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 98 | R<sub>f</sub>: 91 | R<sub>h-15</sub>: 89

MR 0.62 | MDER 0.56

Optical

medium | beam angle 25°

PstLM  $\leq 1.0$ <sup>1 2</sup> | SVM  $\leq 0.4$ <sup>1 2</sup>

Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 28.2 W

system 72 lm/W<sup>3</sup>

Physical


cable 2000 mm

diameter 47 mm | height 110 mm


adapter 402 mm

<sup>1</sup> combined <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Light distribution

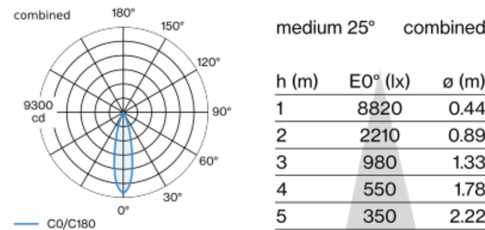

## Product drawing



## Installation instructions

