

# SASSO 100 round wallwasher

trimless exposed concrete

048-2740211A 048-2795210 002-90766



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

black , RAL 9005 <sup>1</sup>

Mounting set white aluminium

IP20

1570 lm

fixture 99 lm/W<sup>2</sup>

## LED

3500 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 96 , R<sub>r</sub>: 90 , R<sub>t(1-5)</sub>: 91

MR 0.74

MDER 0.67

## Optical

wallwasher

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

## Electrical

non DIM

220-240 V

system 18.6 W

fixture 15.8 W

36 Vf

450 mA

PC2

## Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


height 162 mm

3.6 kg


## Cutout

recessed depth 120 mm

## Light distribution



## Product drawing

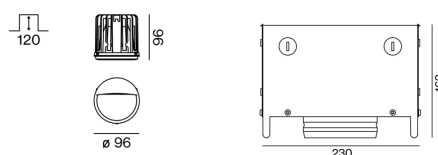

<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

