

SASSO 60 emergency light selftest trim soft acoustic ceiling

048-2693227 048-2696397



Project / Type


Notes

Count / Date




Round LED emergency light inset; surface lacquered in traffic white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; selftest with status LED; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Light distribution

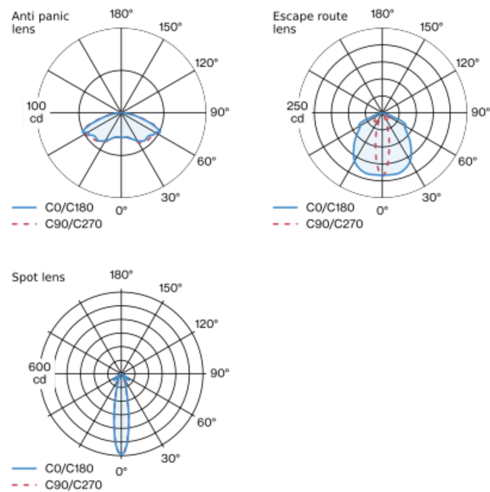

Product drawing



General

Ceiling | Recessed

rotation 360°

traffic white | RAL 9016

Mounting set traffic white

IP20

206¹, 208², 217³ lm

LED

6500 K

CRI ≥ 80

Optical

emergency light | beam angle 21°¹, 103°x25°², 149°x150°³

Electrical

PC2 | 220-240 V

system 1.0 W

system 206¹, 208², 217³ lm/W ⁴

Physical

with trim for acoustic ceiling

diameter 80 mm | height 94 mm

0.4 kg

Cutout

diameter 74 mm

min. ceiling thickness 25 mm | max. ceiling thickness 40 mm

recessed depth 110 mm

¹ Spot lens ² Escape route lens ³ Anti panic lens
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



SASSO 60 emergency light selftest trim soft acoustic ceiling

048-2693227 048-2696397



Project / Type


Notes

Count / Date

Components

MOUNTING SET with trim for soft acoustic ceilings

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	80	048-2696397



Mounting accessories

MOUNTING TOOL

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
for soft acoustic ceilings	traffic black	77-77-35	048-2695918



Electrical accessories

REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

