


# SASSO 60 square downlight


semi-recessed

048-30010114M 002-90771

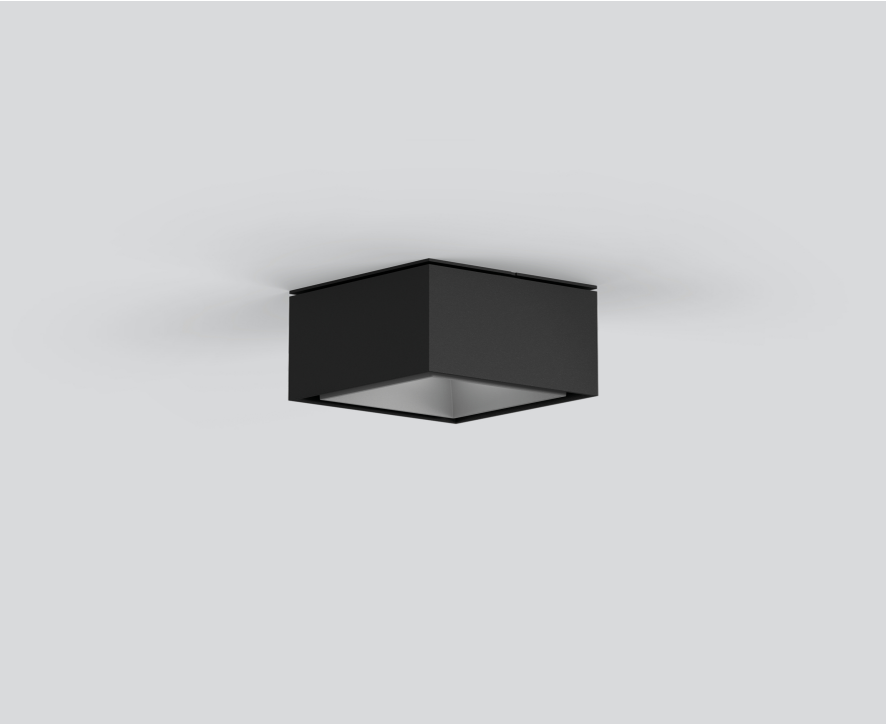


Square semi-recessed spotlight made of aluminium; surface black powder coated; Inner colour lacquered in matt silver; luminaire housing can be attached to mounting plate without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 27° beam; UGR  $\leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; degree of protection IP40; PC2; 220-240 V; incl. converter, non dimmable; external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



|                |
|----------------|
| Project / Type |
| Notes          |
| Count / Date   |



## General

|                               |
|-------------------------------|
| Ceiling   Semi-Recessed       |
| black   RAL 9005 <sup>1</sup> |
| Inner colour matt silver      |
| front IP40   back IP20        |
| 1110 lm                       |
| fixture 104 lm/W <sup>2</sup> |

## LED

|   |
|---|
| 3000 K  |
| CRI $\geq 90$   |
| L80 / 50000 h   |
| initial MacAdam $\leq 2$ SDCM   |
| R <sub>g</sub> : 99   R <sub>f</sub> : 90   R <sub>t(1-15)</sub> : 87 |
| MR 0.6   MDER 0.54  |

## Optical

|   |
|---|
| medium   beam angle 27°                                     |
| UGR $\leq 19$   $\geq 65^\circ$ $< 1500$ cd/m <sup>2</sup>  |
| PstLM $\leq 1.0$ <sup>3</sup>   SVM $\leq 0.4$ <sup>3</sup> |

## Electrical

|                                |
|--------------------------------|
| non DIM                        |
| PC2   220-240 V                |
| system 12.5 W   fixture 10.6 W |
| 36 Vf   300 mA                 |

## Physical

|   |
|---|
| length 72 mm   width 72 mm   height 75 mm |
| 0.48 kg                                   |

## Cutout

|                      |
|----------------------|
| diameter 60 mm       |
| recessed depth 85 mm |

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator



# SASSO 60 square downlight

semi-recessed

048-30010114M 002-90771



Project / Type

Notes

Count / Date

### Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000  | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF               | 0.964                        | 0.923  | 0.884   | 0.847  | 0.811  |
| LSF                | 1                            | 1      | 1   | 1      | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> Room Surface Maintenance Factor |        |        |
| MF                 | Maintenance Factor           |        | LLMF Lamp Lumens Maintenance Factor               |        |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF Lamp Survival Factor                          |        |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

### Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 43                 |
| B13                            | 55                 |
| B16                            | 68                 |
| B20                            | 85                 |
| C10                            | 72                 |
| C13                            | 94                 |
| C16                            | 116                |
| C20                            | 145                |

### Components

#### POWER SUPPLY

|            |                   |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 85-40-22   | 002-90771         |



### Optional electrical accessories

#### DIN RAIL LED DRIVER

|                         |            |                   |
|-------------------------|------------|-------------------|
| TYPE                    | L-W-H (MM) | ARTICLE NUMBER(S) |
| 200 - 1050 mA   2 x 42W | 36-88-59   | 005-6121030       |



#### DIN RAIL POWER SUPPLY

|            |                   |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 72-90-63   | 005-6520210       |



### Optional electrical accessories

#### POWER SUPPLY PREWIRED

|                   |                   |
|-------------------|-------------------|
| TYPE              | ARTICLE NUMBER(S) |
| with junktion box | 002-90790A        |
| with junktion box | 002-90748A        |
| with junktion box | 002-90771A        |
| with junktion box | 002-90742A        |

### Optional electrical accessories

#### POWER SUPPLY

|                            |            |                   |
|----------------------------|------------|-------------------|
| TYPE                       | L-W-H (MM) | ARTICLE NUMBER(S) |
| with loop through function | 185-30-21  | 002-90770         |
| with loop through function | 185-30-21  | 002-90747         |

