

# SASSO 60 square wallwasher

trim

048-2651914A 048-269731G 002-90742



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



### General

Ceiling , Recessed \_\_\_\_\_

matt silver \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

IP20 \_\_\_\_\_

593 lm \_\_\_\_\_

fixture 73 lm/W<sup>1</sup> \_\_\_\_\_

### LED

2700 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L90 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 101 , R<sub>f</sub>: 91 , R<sub>(1-5)</sub>: 89 \_\_\_\_\_

MR 0.56 \_\_\_\_\_

MDER 0.51 \_\_\_\_\_

### Optical

wallwasher \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

### Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 9.5 W \_\_\_\_\_

fixture 8.1 W \_\_\_\_\_

36 Vf \_\_\_\_\_

250 mA \_\_\_\_\_

PC2 \_\_\_\_\_

### Physical

trim \_\_\_\_\_

length 80 mm \_\_\_\_\_

width 80 mm \_\_\_\_\_

height 48 mm \_\_\_\_\_

0.26 kg \_\_\_\_\_

### Cutout

length 73 mm \_\_\_\_\_

width 73 mm \_\_\_\_\_


min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_


recessed depth 60 mm \_\_\_\_\_

Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

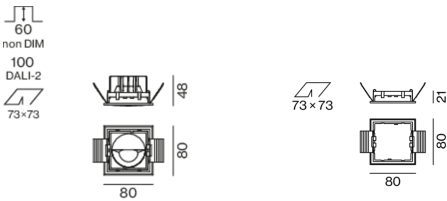

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)

### Installation instructions



### Lighting calculator

