

SASSO 60 round wallwasher/floor trimless soft acoustic ceiling


048-2641917W 048-2696197 002-90742



Project / Type _____


Notes _____

Count / Date _____

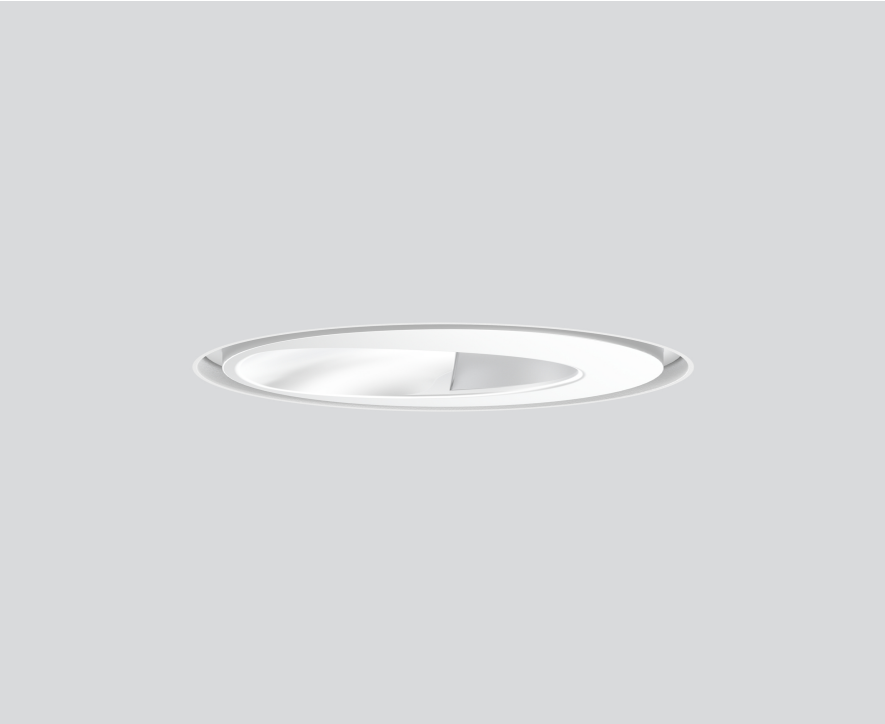

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; traffic white; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling | Recessed _____

rotation 360° _____

white | RAL 9016 ¹ _____

Mounting set traffic white _____

IP20 _____

1000 lm _____

fixture 113 lm/W ² _____

LED

2700 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 101 | R_r: 90 | R_{f(1-5)}: 88 _____

MR 0.51 | MDER 0.46 _____

Optical

wallwasher floor _____

PstLM ≤ 1.0 ³ | SVM ≤ 0.4 ³ _____

Electrical

non DIM _____

PC2 | 220-240 V _____

system 10.4 W | fixture 8.9 W _____

36 Vf | 250 mA _____

Physical

trimless for acoustic ceiling _____

diameter 80 mm | height 48 mm _____

0.59 kg _____

Cutout

diameter 74 mm _____

min. ceiling thickness 25 mm | max. ceiling thickness 40 mm _____

recessed depth 120 mm _____

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

