

SASSO 60 square wallwasher/floor

trim

048-2651111W 048-2697318 002-90748



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

black , RAL 9005 ¹ _____

Mounting set jet black _____

IP20 _____

1080 lm _____

fixture 121 lm/W² _____

LED

4000 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 90 _____

MR 0.81 _____

MDER 0.74 _____

Optical

wallwasher floor _____

PstLM ≤ 1.0 ³ _____

SVM ≤ 0.4 ³ _____

Electrical

DALI-2 _____

220-240 V _____

system 10.4 W _____

fixture 8.9 W _____

36 Vf _____

250 mA _____

PC2 _____

1 DALI Addr. _____

Physical

trim _____

length 80 mm _____

width 80 mm _____

height 48 mm _____

Cutout

length 73 mm _____

width 73 mm _____

min. ceiling thickness 2 mm _____


max. ceiling thickness 25 mm _____

recessed depth 100 mm _____


¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

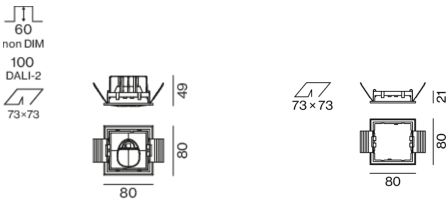

Installation instructions



Lighting calculator

