

ENVIVA louver direct / indirect


suspended
067-02146B78X



Project / Type

Notes

Count / Date

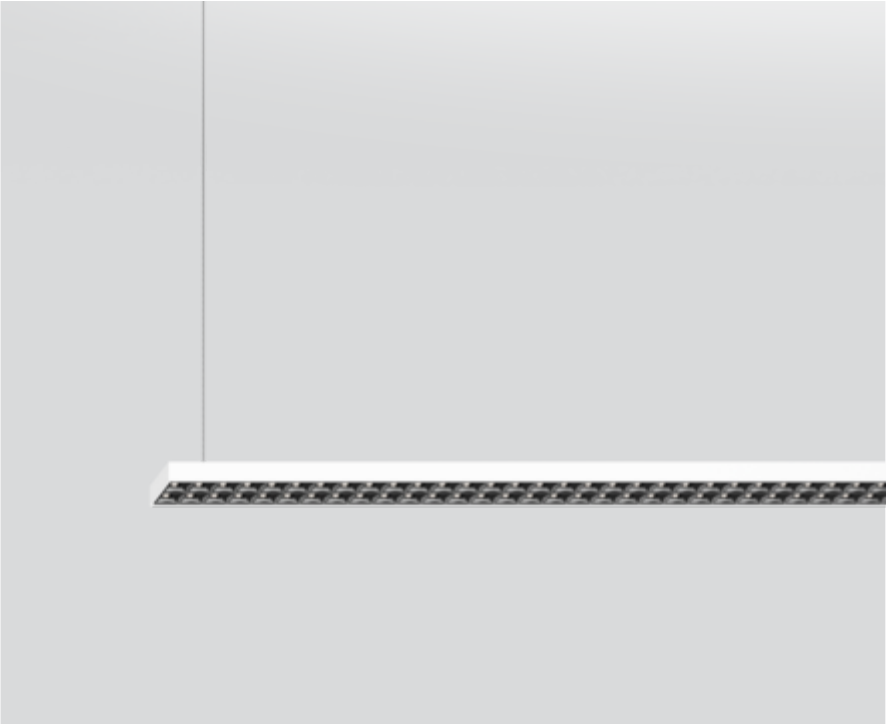


Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 x 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

Light distribution



Product drawing



General

traffic white | RAL 9016 ¹

Inset black

Cable white

IP20

indirect 3500 lm | direct 3620 lm

total 7120 lm

fixture 199 lm/W ²

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

super wide flood

UGR ≤ 16 | ≥65° <1500 cd/m²

PstLM ≤ 1.0³ ⁴ | SVM ≤ 0.4³ ⁴

Electrical

DALI-2 essential sensor | 1 DALI Addr.

brightness & presence

PC2 | 42 V

system 41 W | fixture 36 W

53 mA

Physical

length 1245 mm | width 45 mm | height 15.4 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ 850 mA ⁴ Value of containing product at full load (undimmed)

Installation instructions

