

# ENVIVA louver direct / indirect


suspended  
067-02140178X



Project / Type

Notes

Count / Date

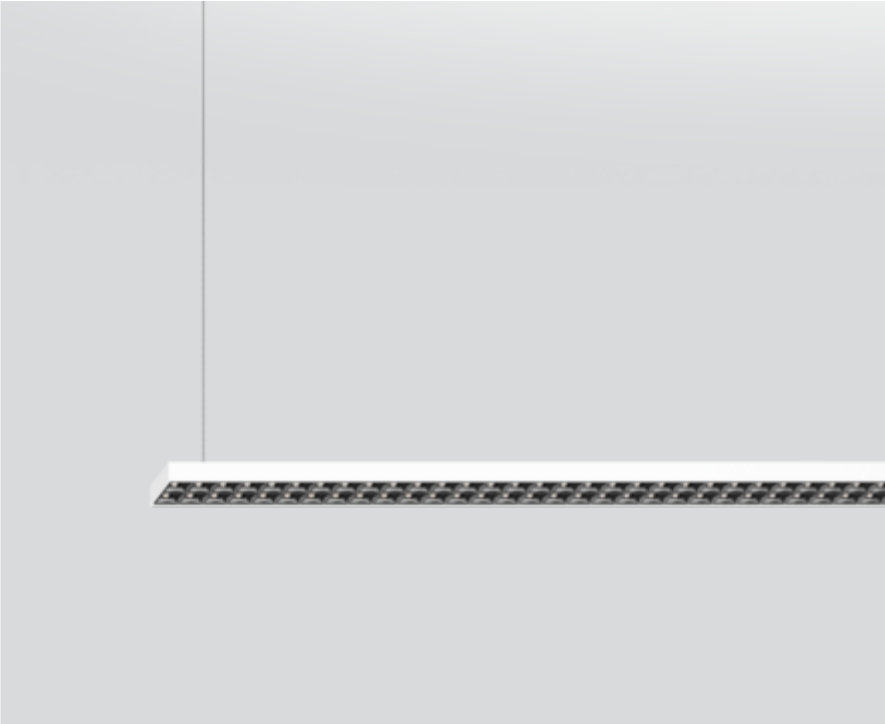

Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 x 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

### Light distribution



### Product drawing



### General

traffic white | RAL 9016 <sup>1</sup>

Inset black

Cable white

IP20

indirect 2650 lm | direct 2740 lm

total 5390 lm

fixture 151 lm/W <sup>2</sup>

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 | R<sub>r</sub>: 91 | R<sub>t(1-15)</sub>: 89

MR 0.61 | MDER 0.55

### Optical

super wide flood

UGR ≤ 16 | ≥65° <1500 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>3</sup> | SVM ≤ 0.4<sup>3</sup> <sup>4</sup>

### Electrical

DALI-2 | 1 DALI Addr.

PC2 | 42 V

system 41 W | fixture 36 W

53 mA

### Physical

length 1204 mm | width 45 mm | height 15.4 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> 850mA <sup>4</sup> Value of containing product at full load (undimmed)

### Installation instructions

