
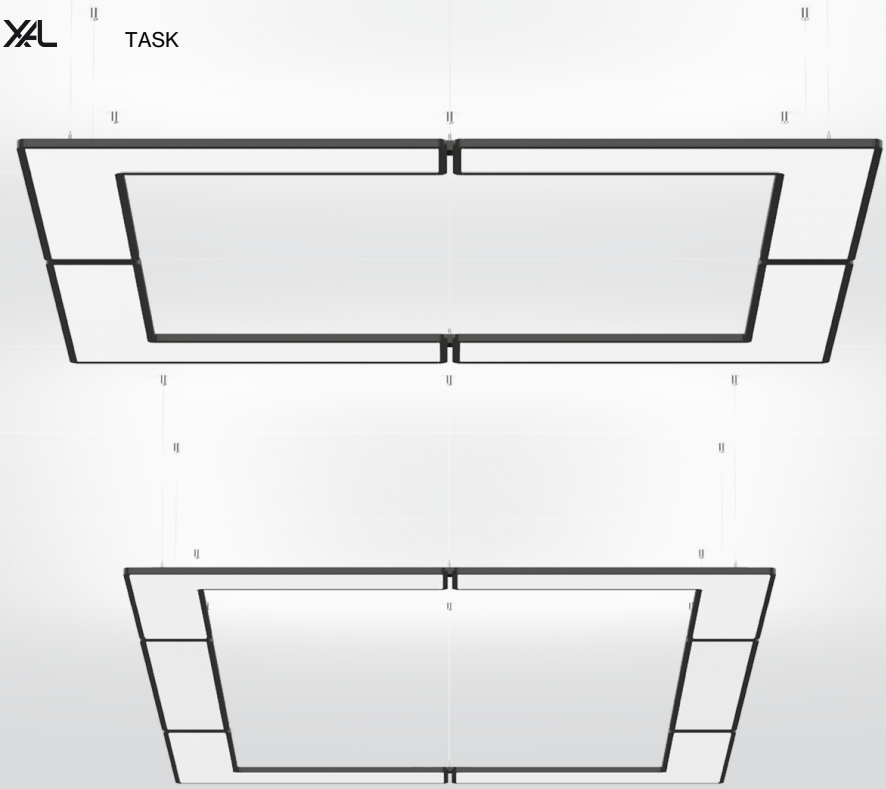


Quickinfo

4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 19
up to ↓ 22,100 lm / ↑ 11,500 lm
up to 120 lm/W
L90 / 50000 h
Cover: Microprismatic
DALI-2
IP20

Types



Colours

Light distributions

TASK angular

suspended

EN Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, toolless height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


DE Rechteckige Pendelleuchte, bestehend aus einzelnen L-förmigen bzw. rechteckigen Elementen; Leuchtenkörper aus Aluminium mit abgerundeten Kanten; extrem flache Bauform (nur 15 mm); Oberfläche pulverbeschichtet; werkzeuglos höhenverstellbare Seilabhängung; komfortables, werkzeugloses Schnellmontagesystem; inkl. Einspeiseleitung; direkte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten gelenkt; Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; optional Akustikelemente erhältlich




DiiA® standards 251, 252, 253




clicksystem



microprismatic
UGR ≤ 19



CRI ≥ 98
XPECTRUM
(optional)





TASK angular suspended

CRI ≥ 90 | UGR ≤ 19 | 220-240 V | 8 ADDR. | X-PERT | X-PERT

DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
197.0 W	4000 K	↧15500/↥8050 lm	120 lm/W	059 - 528313 K






TASK long angular suspended


CRI ≥ 90 | UGR ≤ 19 | 220-240 V | 10 ADDR. | X-PERT | X-PERT

DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
282.0 W	4000 K	↧22100/↥11500 lm	119 lm/W	059 - 528413 K



Planning Information

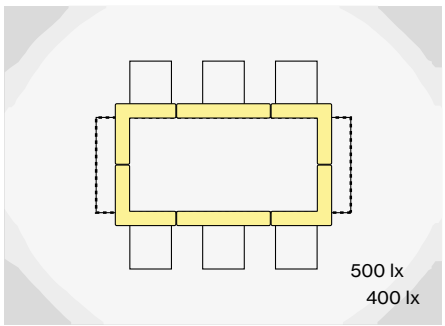



TASK long angular, 280 W, 4000 K, direct / indirect power

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE

Surface dimensions	3.2 × 1.2 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8


Community Windpower, Frodsham

United Kingdom

Photographer
Paul Karalius




Used products



TASK angular suspended



TASK round suspended



TASK circle suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com





