


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 13, UGR ≤ 16, UGR ≤ 19, UGR ≤ 22, UGR ≤ 25
hasta 120 lm/W
L80 / 75000 h, L90 / 100000 h
DALI-2, non atenuable
front IP20, IP40, back IP20

Types

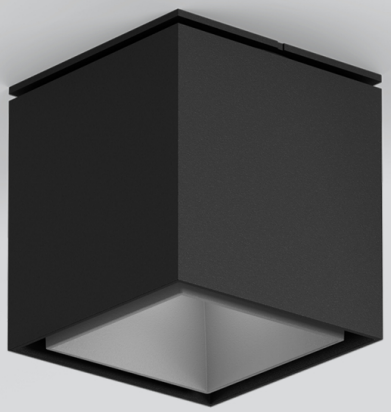

Colours



Color interno



Distribución luminosa



SASSO 60 square

semi-recessed

EN Square semi-recessed spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; choice of symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise due to high quality lens system; with different beam angles; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminium-vaporised surface; COB (Chip on Board) technology for maximum efficiency (DOWNLIGHT); no multiple shadows; efficient LEDs with very good colour rendering; external converter for ceiling insertion, for through-wiring suitable

ES Foco cuadrado de aluminio para el montaje semiempotrado; superf. de inserto lumin. pintada; superf. carcasa con recubr. de polvo; cuerpo luminoso insertable en la placa de montaje por enclavamiento y sin necesidad de herramienta; opcionalmente con característica de emisión simétrica o asimétrica; variantes con emisión simétrica: precisa gracias al excelente sistema de lentes; con diferentes ángulos de emisión; variantes con emisión asimétrica: reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; Chip on Board que proporciona una máxima eficiencia (DOWNLIGHT); no sombras múltiples; LEDS de eficiencia que proporcionan una alta reproducción cromática; convertidor externo para inserción en el techo, adecuado para cableado pasante



wallwasher and wallwasher floor inset



glare control (UGR ≤ 16)



easy mounting no visible screws




Colour Warm Dimming 1800 – 3000 K (optional)



CRI ≥ 95 2 SDCM (optional)



60
85
non DIM
110
DALI-2
125
loop
through
function



SASSO 60 square downlight semi-recessed

CRI ≥ 90 | 2 SDCM | UGR ≤ 13 | cd/m² ≤ 1500 | III | DALI 1 ADDR. | IP20 IP40 | X-PERT

SPOT 15°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.9 W, 36 Vf, 300 mA	2700 K	898 lm	83 lm/W	048-300191 ◪■S
	3000 K	928 lm	85 lm/W	048-300101 ◪■S
	3500 K	947 lm	87 lm/W	048-300121 ◪■S
	4000 K	976 lm	90 lm/W	048-300111 ◪■S

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to inner colour matt silver.

MEDIUM 27°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.6 W, 36 Vf, 300 mA	2700 K	1070 lm	100 lm/W	048-300191 ◪■M
	3000 K	1110 lm	104 lm/W	048-300101 ◪■M
	3500 K	1130 lm	106 lm/W	048-300121 ◪■M
	4000 K	1160 lm	109 lm/W	048-300111 ◪■M

The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to inner colour matt silver.

FLOOD 40°-42°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.6 W, 36 Vf, 300 mA	2700 K	1020 lm	96 lm/W	048-300191 ◪■F
	3000 K	1060 lm	100 lm/W	048-300101 ◪■F
	3500 K	1080 lm	102 lm/W	048-300121 ◪■F
	4000 K	1110 lm	104 lm/W	048-300111 ◪■F

The data values for the luminous flux of fraction may differ for specific order options by -13%. Luminous flux value refers to inner colour matt silver.

WIDE FLOOD 57°-58°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.6 W, 36 Vf, 300 mA	2700 K	1070 lm	101 lm/W	048-300191 ◪■W
	3000 K	1110 lm	104 lm/W	048-300101 ◪■W
	3500 K	1130 lm	107 lm/W	048-300121 ◪■W
	4000 K	1160 lm	109 lm/W	048-300111 ◪■W

The data values for the luminous flux of fraction may differ for specific order options by -10%. Luminous flux value refers to inner colour matt silver.

Order options

COLOUR ◪	
jet black RAL 9005	1
traffic white RAL 9016	7

INNER COLOUR ■	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9




SASSO 60 square wallwasher semi-recessed

CRI ≥ 90 · 2 SDCM · III · 1 ADDR. · X-PERT

WALLWASHER CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 36 Vf, 250 mA	2700 K	1030 lm	117 lm/W	048-360191 ◪■ A
	3000 K	972 lm	110 lm/W	048-360101 ◪■ A
	3500 K	1010 lm	114 lm/W	048-360121 ◪■ A
	4000 K	972 lm	110 lm/W	048-360111 ◪■ A

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour matt silver, traffic white.






SASSO 60 square wallwasher/floor semi-recessed

CRI ≥ 90 · 2 SDCM · III · 1 ADDR. · X-PERT

WALLWASHER FLOOR CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 36 Vf, 250 mA	2700 K	1060 lm	120 lm/W	048-360191 ◪■ W
	3000 K	997 lm	113 lm/W	048-360101 ◪■ W
	3500 K	1040 lm	117 lm/W	048-360121 ◪■ W
	4000 K	997 lm	113 lm/W	048-360111 ◪■ W




Electrical accessories (required)

POWER SUPPLY 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
250 mA | 10 W | non DIM	η 80 %	65·39·20	002-90742
250 mA | 15 W | DALI-2	η 87 %	165·29·21	002-90748
300 mA | 15 W | non DIM	η 84 %	85·40·22	002-90771
300 mA | 15 W | DALI-2	η 87 %	165·29·21	002-90790

2 power supplies for 2 lamps variants necessary

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	005-652021 0

Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

Order options

COLOUR ◪	
jet black RAL 9005	1
traffic white RAL 9016	7

INNER COLOUR ■	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	005-612103 0

200 -1050 mA settable const. current | 2 × 42W | 48V DC | U OUT 10 – 40 V SELV

POWER SUPPLY PRE-WIRED with junction box 198-264 V AC, PC2

TYPE	EFFICIENCY	ORDER CODE
300 mA | 15 W | DALI-2	η 87 %	002-90790A
250 mA | 15 W | DALI-2	η 87 %	002-90748A
300 mA | 15 W | non DIM	η 84 %	002-90771A
250 mA | 10 W | non DIM	η 80 %	002-90742A

2 power supplies for 2 lamps variants necessary

POWER SUPPLY with loop through function DALI-2, 15 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
300 mA	η 87 %	185·30·21	002-90770
250 mA	η 87 %	185·30·21	002-90747

2 power supplies for 2 lamps variants necessary