




Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 19
hasta 2.130 lm/m
hasta 140 lm/W
L85 / 50000 h
DALI-2
Jut-Out, Microprismatic, Opal
IP40, back IP20

Types



Colours



Distribución luminosa



LENO

semi-recessed

EN Low profile recessed mounted luminaire, 15 mm visible height; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; surface powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light, directed downwards by LGP body (Light Guiding Prism) and highly efficient reflector; homogeneously illuminated, satinised (flush or jut-out) or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering


ES Lámpara empotrable extremadamente plana con altura visible de 15 mm; apropiado para el montaje en la pared y en el techo; apropiada para el montaje en hormigón alisado u hormigón visto, en construcciones de placas de yeso y en paredes o techos enlucidos; superficie con recubrimiento de pintura en polvo; elemento de luz asegurado contra caídas de perfil de aluminio extrusionado que se puede introducir en el canal sin herramientas por medio de un soporte magnético; fuente de luz insertada en un lateral que es guiada y reflectada a través de unos prismas y reflector de alta calidad; cubierta de PMMA iluminada homogéneamente, satinada (enrasada o sobresaliente) o micro-prismática; LEDS de alta eficiencia que proporcionan una alta reproducción cromática



DiiA® standards 251, 252, 253



system solution




microprismatic UGR ≤ 19



quick installation

LENO semi-recessed

CRI ≥ 80 | UGR ≤ 19 | 220-240 V | DALI 1 ADDR. | IP20 IP40 | X-PERT



MICROPRISMATIC CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1160 lm	117 lm/W	051-851253 G
		4000 K	1230 lm	124 lm/W	051-851263 G
19.1 W	1226 mm	3000 K	2320 lm	121 lm/W	051-851453 G
		4000 K	2450 lm	128 lm/W	051-851463 G
28.6 W	1835 mm	3000 K	3480 lm	122 lm/W	051-851653 G
		4000 K	3680 lm	129 lm/W	051-851663 G
37.0 W	2443 mm	3000 K	4630 lm	125 lm/W	051-851853 G
		4000 K	4910 lm	133 lm/W	051-851863 G

OPAL CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1220 lm	123 lm/W	051-851253 H
		4000 K	1300 lm	131 lm/W	051-851263 H
19.1 W	1226 mm	3000 K	2450 lm	128 lm/W	051-851453 H
		4000 K	2590 lm	136 lm/W	051-851463 H
28.6 W	1835 mm	3000 K	3670 lm	128 lm/W	051-851653 H
		4000 K	3890 lm	136 lm/W	051-851663 H
37.0 W	2443 mm	3000 K	4900 lm	132 lm/W	051-851853 H
		4000 K	5190 lm	140 lm/W	051-851863 H


OPAL JUT-OUT CRI ≥ 80, DALI-2


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1170 lm	118 lm/W	051-851253 J
		4000 K	1240 lm	125 lm/W	051-851263 J
19.1 W	1226 mm	3000 K	2350 lm	123 lm/W	051-851453 J
		4000 K	2490 lm	130 lm/W	051-851463 J
28.6 W	1835 mm	3000 K	3520 lm	123 lm/W	051-851653 J
		4000 K	3730 lm	130 lm/W	051-851663 J
37.0 W	2443 mm	3000 K	4700 lm	127 lm/W	051-851853 J
		4000 K	4970 lm	134 lm/W	051-851863 J

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8

Planning Information

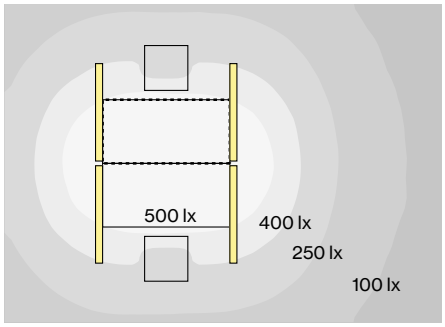

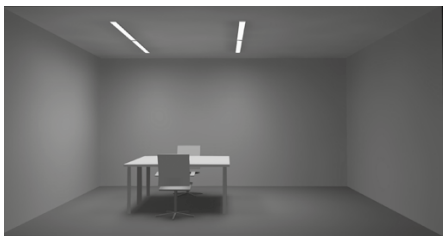

LENO semi-recessed, 19.1 W, 4000 K

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

Mounting tools accessories

DISMOUNTING TOOL

TYPE	ORDER CODE
vacuum cup	086-30000