


Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 19
jusqu'à 2 130 lm/m
jusqu'à 140 lm/W
L85 / 50000 h
Cache : Jut-Out, Microprismatic, Opal
DALI-2
IP20

Types



Colours

Répartition de la lumière

LENO

surface

EN Low profile surface mounted luminaire, 28 mm total height; suitable for wall or ceiling mounting; surface powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light, directed downwards by LGP body (Light Guiding Prism) and highly efficient reflector; homogeneously illuminated, satinised (flush or jut-out) or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering


FR Luminaire en saillie extrêmement plat d'une hauteur totale de 28 mm ; convient au montage au plafond ou mural ; surface thermolaquée ; élément d'éclairage antichute en profil d'aluminium extrudé pour montage en canal sans outil au moyen de fixations magnétiques ; lumière couplée latéralement guidée vers le bas par LGP Body (Light Guiding Prism) et réflecteur haut. efficace ; cache éclairé de façon homogène, satiné (affleurant ou en saillie) ou microprismatique en PMMA ; LED économes en énergie à restitution de couleur élevée



DiiA® standards 251, 252, 253




system solution



microprismatic UGR ≤ 19



quick installation



LENO SURFACE

CRI ≥ 80 | UGR ≤ 19 | 220-240 V | 1 ADDR. | X-PERT

MICROPRISMATIC CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1160 lm	117 lm/W	051-911253◪G
		4000 K	1230 lm	124 lm/W	051-911263◪G
19.1 W	1226 mm	3000 K	2320 lm	121 lm/W	051-911453◪G
		4000 K	2450 lm	128 lm/W	051-911463◪G
28.6 W	1835 mm	3000 K	3480 lm	122 lm/W	051-911653◪G
		4000 K	3680 lm	129 lm/W	051-911663◪G
37.0 W	2443 mm	3000 K	4630 lm	125 lm/W	051-911853◪G
		4000 K	4910 lm	133 lm/W	051-911863◪G

OPAL CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1220 lm	123 lm/W	051-911253◪H
		4000 K	1300 lm	131 lm/W	051-911263◪H
19.1 W	1226 mm	3000 K	2450 lm	128 lm/W	051-911453◪H
		4000 K	2590 lm	136 lm/W	051-911463◪H
28.6 W	1835 mm	3000 K	3670 lm	128 lm/W	051-911653◪H
		4000 K	3890 lm	136 lm/W	051-911663◪H
37.0 W	2443 mm	3000 K	4900 lm	132 lm/W	051-911853◪H
		4000 K	5190 lm	140 lm/W	051-911863◪H


OPAL JUT-OUT CRI ≥ 80, DALI-2


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1170 lm	118 lm/W	051-911253◪J
		4000 K	1240 lm	125 lm/W	051-911263◪J
19.1 W	1226 mm	3000 K	2350 lm	123 lm/W	051-911453◪J
		4000 K	2490 lm	130 lm/W	051-911463◪J
28.6 W	1835 mm	3000 K	3520 lm	123 lm/W	051-911653◪J
		4000 K	3730 lm	130 lm/W	051-911663◪J
37.0 W	2443 mm	3000 K	4700 lm	127 lm/W	051-911853◪J
		4000 K	4970 lm	134 lm/W	051-911863◪J

Order options

COLOUR ◪	
pure white RAL 9010	7
jet black RAL 9005	8

Planning Information

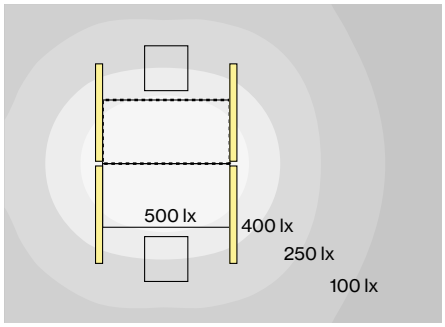

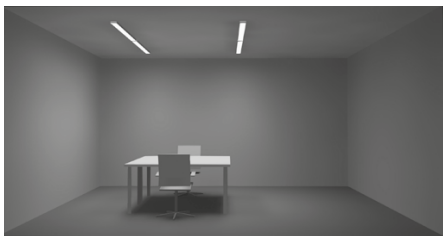

LENO surface, microprismatic, 19.1 W, 4000 K

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE ·····

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19