



## PABLO multilens


<sup>EN</sup> Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; exchangeable additional lenses; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, as an accessory

<sup>IT</sup> Faretto da binario elettrificato in alluminio pressofuso; verniciatura a polvere; girevole 360° e orientabile 310°; converter integrato nel telaio di alluminio del faretto; con tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; lenti ad-diz. intercambiabili; curva fotometrica precisa con diversi angoli di emissione; montaggio e smontaggio senza utensili; unità ottiche come accessori; adattatore per installazione senza utensili o scorrimento in vari binari trifase; fissaggio adattatore a scelta senza attrezzi mediante vite a testa zigrinata o vite di serraggio (cacciavite necessario); allacciamento singolo con armatura a plafone o da incasso, come accessorio

### Quickinfo

3000 K, 4000 K  
CRI ≥ 90 / 2 SDCM (initial MacAdam)  
fino a 73 lm/W  
L85 / 50000 h  
DIM POT1  
IP20

### Types



### Colore



### Distribuzione della luce



compatible with  
MOVE IT PRO  
45



DiiA® standards  
251, 252, 253



interchangeable  
diffusion sheets



360° rotatable,  
310° tiltable



DIM POT1 /  
rotation lock




## PABLO multilens track




WIDE FLOOD / FLOOD / MEDIUM / SPOT / SUPER SPOT / OVAL 10°-64°, CRI ≥ 90, DIM POTI

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.7 W	3000 K	1010 lm	69 lm/W	1 8 0 - 5 7 <input checked="" type="checkbox"/> 0 5 8 <input checked="" type="checkbox"/>
	4000 K	1090 lm	74 lm/W	1 8 0 - 5 7 <input checked="" type="checkbox"/> 0 6 8 <input checked="" type="checkbox"/>

incl. 5 pcs. interchangeable diffusion sheets



## Planning Information

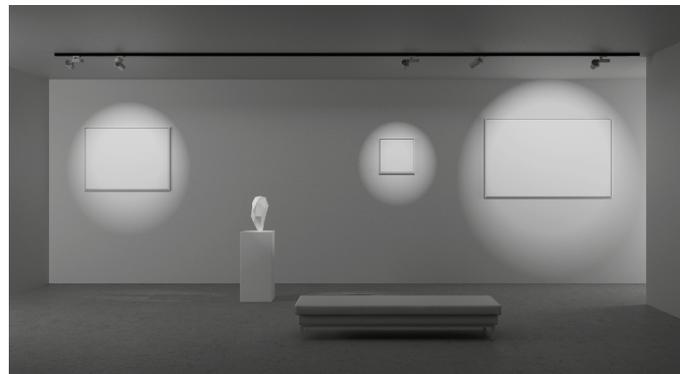

## Mounting accessories (optional)

**RECESSED HOUSING / POINT OUTLET** ceiling thickness, 1-30 mm

Ø-H (mm)	ORDER CODE
151-60	1 8 6 - 0 7 2 2 7 <input checked="" type="checkbox"/>

**SURFACE HOUSING / POINT OUTLET**

Ø-H (mm)	ORDER CODE
120-32	1 8 6 - 0 7 2 2 8 <input checked="" type="checkbox"/>

## Optical accessories (optional)



**DIFFUSION SHEET FOR SUPERSPOT**

TYPE	ORDER CODE
for a better homogeneous illumination	0 8 0 - 5 9 0 0 0 3 0



**OVAL FILTER 60 x 15°**

ORDER CODE
0 8 0 - 5 9 0 0 0 2 0

## Order options

MOUNTING	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8