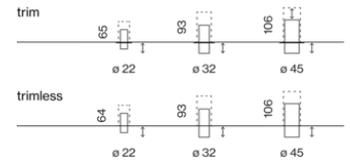




Quickinfo

2700 K, 3000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 fino a 106 lm/W
 L80 / 50000 h, L80 / 50000h,
 L85 / 50000 h
 DALI-2, non DIM
 front IP20

Types



Colore



Set di montaggio



Distribuzione della luce



MOVE IN round

recessed

^{EN} Round spotlight element in aluminium, available in 3 sizes; powder coated; installation without tools in mounting set (trimless or with trim) with ball catch system; special mounting tool for easy installation of the trimless housing available as an accessory; spotlight element height adjustable without tools: flush with the ceiling, or extended 25 mm or 35 mm; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; high quality, aluminium, vapour deposition coated reflector with faceted design; precise radiation characteristic; good glare reduction due to recessed light point plane; optical attachments as accessories

^{IT} Elemento faretto rotondo in alluminio, tre misure; verniciatura a polvere; set di fissaggio con cuscinetto a sfera, senza bisogno di utensili (con o senza bordo perimetrale); utensile di montaggio speciale per una facile installazione dell'housing senza bordi disponibile come accessorio; faretto regolabile in altezza senza utensili: a filo soffitto o sporgente di 25 mm o 35 mm; tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; riflettore d'alta qualità con ottica sfaccettata in alluminio applicato a vapore; emissione precisa; ottima schermatura con superficie di emissione arretrata; unità ottiche come accessori



wallwasher floor optic



trimless installation in plasterboard



tool-free height adjustment



MOVE IN 22 round



SPOT 15°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
5.6 W, 36 Vf, 150 mA	2700 K	328 lm	59 lm/W	0 6 3 - 8 1 0 1 4 1 <input checked="" type="checkbox"/> S
	3000 K	346 lm	62 lm/W	0 6 3 - 8 1 0 1 5 1 <input checked="" type="checkbox"/> S

incl. connection cable 600mm



MEDIUM 26°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
5.6 W, 36 Vf, 150 mA	2700 K	345 lm	62 lm/W	0 6 3 - 8 1 0 1 4 1 <input checked="" type="checkbox"/> M
	3000 K	364 lm	65 lm/W	0 6 3 - 8 1 0 1 5 1 <input checked="" type="checkbox"/> M

incl. connection cable 600mm

FLOOD 43°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
5.6 W, 36 Vf, 150 mA	2700 K	371 lm	67 lm/W	0 6 3 - 8 1 0 1 4 1 <input checked="" type="checkbox"/> F
	3000 K	391 lm	70 lm/W	0 6 3 - 8 1 0 1 5 1 <input checked="" type="checkbox"/> F

incl. connection cable 600mm



MOVE IN 32 round



SPOT 18°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.7 W, 36 Vf, 250 mA	2700 K	788 lm	91 lm/W	0 6 3 - 8 1 1 1 4 1 <input checked="" type="checkbox"/> S
	3000 K	817 lm	94 lm/W	0 6 3 - 8 1 1 1 5 1 <input checked="" type="checkbox"/> S

incl. connection cable 600mm



MEDIUM 24°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.7 W, 36 Vf, 250 mA	2700 K	821 lm	94 lm/W	0 6 3 - 8 1 1 1 4 1 <input checked="" type="checkbox"/> M
	3000 K	852 lm	98 lm/W	0 6 3 - 8 1 1 1 5 1 <input checked="" type="checkbox"/> M

incl. connection cable 600mm

FLOOD 34°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.7 W, 36 Vf, 250 mA	2700 K	783 lm	90 lm/W	0 6 3 - 8 1 1 1 4 1 <input checked="" type="checkbox"/> F
	3000 K	813 lm	93 lm/W	0 6 3 - 8 1 1 1 5 1 <input checked="" type="checkbox"/> F

incl. connection cable 600mm

Order options

COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8

**MOVE IN 45 round****SUPER SPOT 8°, CRI ≥ 90**

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.9 W, 11 Vf, 600 mA	2700 K	406 lm	59 lm/W	0 6 3 - 8 1 2 1 4 1 <input checked="" type="checkbox"/> V
	3000 K	432 lm	63 lm/W	0 6 3 - 8 1 2 1 5 1 <input checked="" type="checkbox"/> V

incl. connection cable 600mm; do not use optical filters

**SPOT 12°, CRI ≥ 90**

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.7 W, 37 Vf, 350 mA	2700 K	1100 lm	87 lm/W	0 6 3 - 8 1 2 1 4 1 <input checked="" type="checkbox"/> S
	3000 K	1150 lm	91 lm/W	0 6 3 - 8 1 2 1 5 1 <input checked="" type="checkbox"/> S

incl. connection cable 600mm

MEDIUM 24°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.4 W, 36 Vf, 400 mA	2700 K	1330 lm	100 lm/W	0 6 3 - 8 1 2 1 4 1 <input checked="" type="checkbox"/> M
	3000 K	1380 lm	104 lm/W	0 6 3 - 8 1 2 1 5 1 <input checked="" type="checkbox"/> M

incl. connection cable 600mm

FLOOD 36°, CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.4 W, 36 Vf, 400 mA	2700 K	1360 lm	102 lm/W	0 6 3 - 8 1 2 1 4 1 <input checked="" type="checkbox"/> F
	3000 K	1420 lm	106 lm/W	0 6 3 - 8 1 2 1 5 1 <input checked="" type="checkbox"/> F

incl. connection cable 600mm

WALLWASHER FLOOR 51°, CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.9 W, 36 Vf, 400 mA	2700 K	1340 lm	90 lm/W	0 6 3 - 8 1 2 1 4 1 <input checked="" type="checkbox"/> Y
	3000 K	1340 lm	90 lm/W	0 6 3 - 8 1 2 1 5 1 <input checked="" type="checkbox"/> Y

incl. connection cable 600mm; do not use optical filters

Mounting accessories (required)**MOUNTING HOUSING trimless** for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	56-64	0 6 3 - 8 8 1 0 1 1 7

for MOVE IN 22 round


**MOUNTING HOUSING trimless** for plasterboard ceilings


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	63-93	0 6 3 - 8 8 1 1 1 1 7


for MOVE IN 32 round


Order options

COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8


	MOUNTING HOUSING trimless for plasterboard ceilings											
	<table border="0"> <thead> <tr> <th>COLOUR</th> <th>CEILING THICKNESS</th> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>traffic white</td> <td>9-25 mm</td> <td>75-106</td> <td>0 6 3 - 8 8 1 2 1 1 7</td> </tr> <tr> <td colspan="4">for MOVE IN 45 round</td> </tr> </tbody> </table>	COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE	traffic white	9-25 mm	75-106	0 6 3 - 8 8 1 2 1 1 7	for MOVE IN 45 round		
COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE									
traffic white	9-25 mm	75-106	0 6 3 - 8 8 1 2 1 1 7									
for MOVE IN 45 round												


	MOUNTING HOUSING with trim for ceilings, 2-25 mm											
	<table border="0"> <thead> <tr> <th>COLOUR</th> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>traffic white</td> <td>59-65</td> <td>0 6 3 - 8 8 2 0 1 1 7</td> </tr> <tr> <td>jet black</td> <td>59-65</td> <td>0 6 3 - 8 8 2 0 1 1 8</td> </tr> <tr> <td colspan="3">for MOVE IN 22 round</td> </tr> </tbody> </table>	COLOUR	Ø-H (mm)	ORDER CODE	traffic white	59-65	0 6 3 - 8 8 2 0 1 1 7	jet black	59-65	0 6 3 - 8 8 2 0 1 1 8	for MOVE IN 22 round	
COLOUR	Ø-H (mm)	ORDER CODE										
traffic white	59-65	0 6 3 - 8 8 2 0 1 1 7										
jet black	59-65	0 6 3 - 8 8 2 0 1 1 8										
for MOVE IN 22 round												

	MOUNTING HOUSING with trim for ceilings, 2-25 mm											
	<table border="0"> <thead> <tr> <th>COLOUR</th> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>traffic white</td> <td>65-93</td> <td>0 6 3 - 8 8 2 1 1 1 7</td> </tr> <tr> <td>jet black</td> <td>65-93</td> <td>0 6 3 - 8 8 2 1 1 1 8</td> </tr> <tr> <td colspan="3">for MOVE IN 32 round</td> </tr> </tbody> </table>	COLOUR	Ø-H (mm)	ORDER CODE	traffic white	65-93	0 6 3 - 8 8 2 1 1 1 7	jet black	65-93	0 6 3 - 8 8 2 1 1 1 8	for MOVE IN 32 round	
COLOUR	Ø-H (mm)	ORDER CODE										
traffic white	65-93	0 6 3 - 8 8 2 1 1 1 7										
jet black	65-93	0 6 3 - 8 8 2 1 1 1 8										
for MOVE IN 32 round												

	MOUNTING HOUSING with trim for ceilings, 2-25 mm											
	<table border="0"> <thead> <tr> <th>COLOUR</th> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>traffic white</td> <td>77-107</td> <td>0 6 3 - 8 8 2 2 1 1 7</td> </tr> <tr> <td>jet black</td> <td>77-107</td> <td>0 6 3 - 8 8 2 2 1 1 8</td> </tr> <tr> <td colspan="3">for MOVE IN 45 round</td> </tr> </tbody> </table>	COLOUR	Ø-H (mm)	ORDER CODE	traffic white	77-107	0 6 3 - 8 8 2 2 1 1 7	jet black	77-107	0 6 3 - 8 8 2 2 1 1 8	for MOVE IN 45 round	
COLOUR	Ø-H (mm)	ORDER CODE										
traffic white	77-107	0 6 3 - 8 8 2 2 1 1 7										
jet black	77-107	0 6 3 - 8 8 2 2 1 1 8										
for MOVE IN 45 round												

Mounting tools accessories (optional)

	SPECIAL MOUNTING TOOL											
	<table border="0"> <thead> <tr> <th>TYPE</th> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>for MOVE IN 22 SPIO 20</td> <td></td> <td>0 4 8 - 1 6 9 0 0 0 0</td> </tr> <tr> <td>for MOVE IN 32 round</td> <td>83-107</td> <td>0 6 3 - 8 9 1 1 1 1 0</td> </tr> <tr> <td colspan="3">necessary to install mounting housing trimless</td> </tr> </tbody> </table>	TYPE	Ø-H (mm)	ORDER CODE	for MOVE IN 22 SPIO 20		0 4 8 - 1 6 9 0 0 0 0	for MOVE IN 32 round	83-107	0 6 3 - 8 9 1 1 1 1 0	necessary to install mounting housing trimless	
TYPE	Ø-H (mm)	ORDER CODE										
for MOVE IN 22 SPIO 20		0 4 8 - 1 6 9 0 0 0 0										
for MOVE IN 32 round	83-107	0 6 3 - 8 9 1 1 1 1 0										
necessary to install mounting housing trimless												

	SPECIAL MOUNTING TOOL for ARY MOVE IN 45 NOBA trimless TULA					
	<table border="0"> <thead> <tr> <th>Ø-H (mm)</th> <th>ORDER CODE</th> </tr> </thead> <tbody> <tr> <td>100-107</td> <td>0 6 3 - 8 9 1 2 1 1 0</td> </tr> <tr> <td colspan="2">necessary to install mounting housing trimless</td> </tr> </tbody> </table>	Ø-H (mm)	ORDER CODE	100-107	0 6 3 - 8 9 1 2 1 1 0	necessary to install mounting housing trimless
Ø-H (mm)	ORDER CODE					
100-107	0 6 3 - 8 9 1 2 1 1 0					
necessary to install mounting housing trimless						

Electrical accessories (required)

POWER SUPPLY


TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
350 mA 15 W DALI-2 PC2	198-264 V AC	η 87 %	166-29-21	0 0 2 - 9 0 7 2 0
350 mA 22 W non DIM PC2	198-264 V AC	η 89 %	180-30-21	0 0 2 - 9 0 7 2 2
400 mA 22 W non DIM PC2	198-264 V AC	η 89 %	180-30-21	0 0 2 - 9 0 7 2 4

Order options

COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
600 mA 30 W non DIM PC1	198-264 V AC	η 89 %	180-30-21	0 0 2 - 9 0 7 2 6
400 mA 15 W DALI-2 PC2	198-264 V AC	η 87 %	166-29-21	0 0 2 - 9 0 7 2 8
600 mA 40 W DALI-2 PC2	198-264 V AC	η 89 %	197-29-21	0 0 2 - 9 0 7 2 9
150 mA non DIM			138-30-21	0 0 2 - 9 0 7 3 4
150 mA DALI-2			165-29-21	0 0 2 - 9 0 7 3 5
250 mA 10 W non DIM PC2	198-264 V AC	η 80 %	65-39-20	0 0 2 - 9 0 7 4 2
250 mA 10 W DALI-2 PC2	198-264 V AC	η 82 %	166-29-21	0 0 2 - 9 0 7 4 3

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V

Optical accessories (optional)

HONEYCOMB LOUVER for MOVE IN 22 | TILA 22

COLOUR	Ø-H (mm)	ORDER CODE
jet black	20-3	0 0 7 - 1 9 6 5 1 1 8



HONEYCOMB LOUVER for BO 32 | JUST 32 | MOVE IN 32 | TARO 32 | TILA 32

COLOUR	Ø-H (mm)	ORDER CODE
jet black	30-3	0 0 7 - 1 9 6 5 1 6 8



HONEYCOMB LOUVER for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42-3	0 0 7 - 1 9 6 5 1 8 8



OVAL LENS for BO 32 | MOVE IN 32 | TARO 32 | TILA 32

Ø-H (mm)	ORDER CODE
30-3	0 0 7 - 1 9 6 5 8 6 0



OVAL LENS for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 8 8 0

Order options

COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8

 	SOFT LENS for BO 32 MOVE IN 32 TARO 32 TILA 32	ORDER CODE
	\varnothing -H (mm) 30-3	0 0 7 - 1 9 6 5 9 6 0
 	SOFT LENS for ARY BO 45 JUST 45 MOVE IN 45 TARO 45 TULA micro	ORDER CODE
	\varnothing -H (mm) 42-3	0 0 7 - 1 9 6 5 9 8 0
 	WALLWASHER LENS for BO 32 MOVE IN 32 TARO 32 TILA 32	ORDER CODE
	\varnothing -H (mm) 30-3	0 0 7 - 1 9 6 5 7 6 0
 	WALLWASHER LENS for ARY BO 45 JUST 45 MOVE IN 45 TARO 45 TULA micro	ORDER CODE
	\varnothing -H (mm) 42-3	0 0 7 - 1 9 6 5 7 8 0

Order options

COLOUR	<input checked="" type="checkbox"/>
chrome	4
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8