




## Quickinfo

2700 K, 3000 K  
 CRI  $\geq$  90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)  
 fino a 106 lm/W  
 L80 / 50000 h, L85 / 50000 h  
 DALI-2, non DIM  
 front IP20

## Types

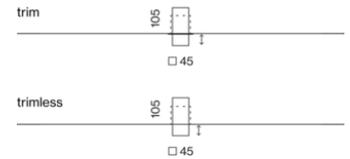

## Colore



## Set di montaggio



## Distribuzione della luce



# MOVE IN 45 square

recessed

<sup>EN</sup> Square spotlight element in aluminium; powder coated; installation without tools in mounting set (trimless or with trim) with ball catch system; special mounting tool for easy installation of the trimless housing available as an accessory; spotlight element height adjustable without tools: flush with the ceiling, or extended 25mm or 35mm; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; high-quality, aluminium, vapour deposition coated reflector with faceted design; precise radiation characteristic; good glare reduction due to recessed light point plane; optical attachments as accessories

<sup>IT</sup> Faretto quadrato in alluminio; verniciatura a polvere; set di fissaggio con cuscinetto a sfera, senza bisogno di utensili (con o senza bordo perimetrale); utensile di montaggio speciale per una facile installazione dell'housing senza bordi disponibile come accessorio; faretto regolabile in altezza senza utensili: a filo soffitto o sporgente di 25mm o 35mm; tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; riflettore d'alta qualità con ottica sfaccettata in alluminio applicato a vapore; emissione precisa; ottima schermatura con superficie di emissione arretrata; unità ottiche come accessori



trimless  
 installation in  
 plasterboard



tool-free height  
 adjustment



## MOVE IN 45 square



### SUPER SPOT 8°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.9 W, 11 Vf, 600 mA	2700 K	406 lm	59 lm/W	0 6 3 - 8 4 2 1 4 1 <input checked="" type="checkbox"/> V
	3000 K	432 lm	63 lm/W	0 6 3 - 8 4 2 1 5 1 <input checked="" type="checkbox"/> V

incl. connection cable 600mm



### SPOT 12°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.7 W, 37 Vf, 350 mA	2700 K	1100 lm	87 lm/W	0 6 3 - 8 4 2 1 4 1 <input checked="" type="checkbox"/> S
	3000 K	1150 lm	91 lm/W	0 6 3 - 8 4 2 1 5 1 <input checked="" type="checkbox"/> S

incl. connection cable 600mm

### MEDIUM 24°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.4 W, 36 Vf, 400 mA	2700 K	1330 lm	100 lm/W	0 6 3 - 8 4 2 1 4 1 <input checked="" type="checkbox"/> M
	3000 K	1380 lm	104 lm/W	0 6 3 - 8 4 2 1 5 1 <input checked="" type="checkbox"/> M

incl. connection cable 600mm

### FLOOD 36°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.4 W, 36 Vf, 400 mA	2700 K	1360 lm	102 lm/W	0 6 3 - 8 4 2 1 4 1 <input checked="" type="checkbox"/> F
	3000 K	1420 lm	106 lm/W	0 6 3 - 8 4 2 1 5 1 <input checked="" type="checkbox"/> F

incl. connection cable 600mm

## Mounting accessories (required)



### MOUNTING HOUSING trimless for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	80-54	0 6 3 - 8 8 3 2 1 1 7

for MOVE IN 45 square



### MOUNTING HOUSING with trim for ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
traffic white	78-78-55	0 6 3 - 8 8 4 2 1 1 7
jet black	78-78-55	0 6 3 - 8 8 4 2 1 1 8

for MOVE IN 45 square

## Mounting tools accessories (optional)



### SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless

## Order options


COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8

## Electrical accessories (required)

### POWER SUPPLY 198-264 V AC

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
350 mA   15 W   DALI-2   PC2	η 87 %	166-29-21	0 0 2 - 9 0 7 2 0
350 mA   22 W   non DIM   PC2	η 89 %	180-30-21	0 0 2 - 9 0 7 2 2
400 mA   22 W   non DIM   PC2	η 89 %	180-30-21	0 0 2 - 9 0 7 2 4
600 mA   30 W   non DIM   PC1	η 89 %	180-30-21	0 0 2 - 9 0 7 2 6
400 mA   15 W   DALI-2   PC2	η 87 %	166-29-21	0 0 2 - 9 0 7 2 8
600 mA   40 W   DALI-2   PC2	η 89 %	197-29-21	0 0 2 - 9 0 7 2 9

## Electrical accessories (optional)



### DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W   PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

### DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 -1050mA settable const. current | 2×42W | 48V DC | U OUT 10-40V SELV

## Optical accessories (optional)



### HONEYCOMB LOUVER for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42-3	0 0 7 - 1 9 6 5 1 8 8

## Order options

COLOUR	
chrome	4 <input checked="" type="checkbox"/>
brushed aluminium	6
traffic white RAL 9016	7
jet black RAL 9005	8

# Hotel Stoiser

Austria

**Architetto**  
EDERARCH ZT GmbH

**Lighting Design**  
Eugen Schöberl

**Fotografo**  
Miriam Raneburger



## Prodotti utilizzati



**MOVE IN 45 square  
recessed**



